





REV	NATURE OF MODIFICATOON	CHANGED BY	DATE
V01			
V02			
V03			

正视图

侧视图

背视图


背视图
FPC固定出货

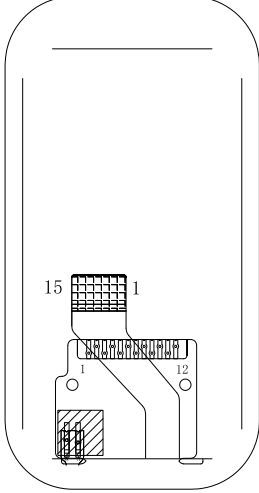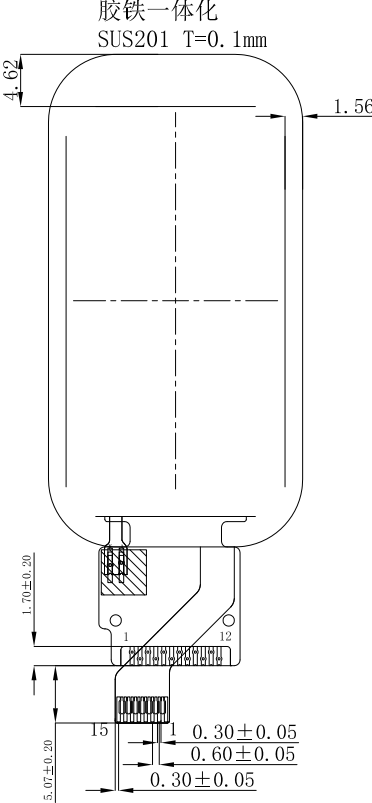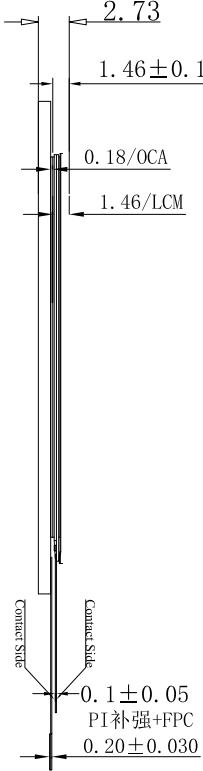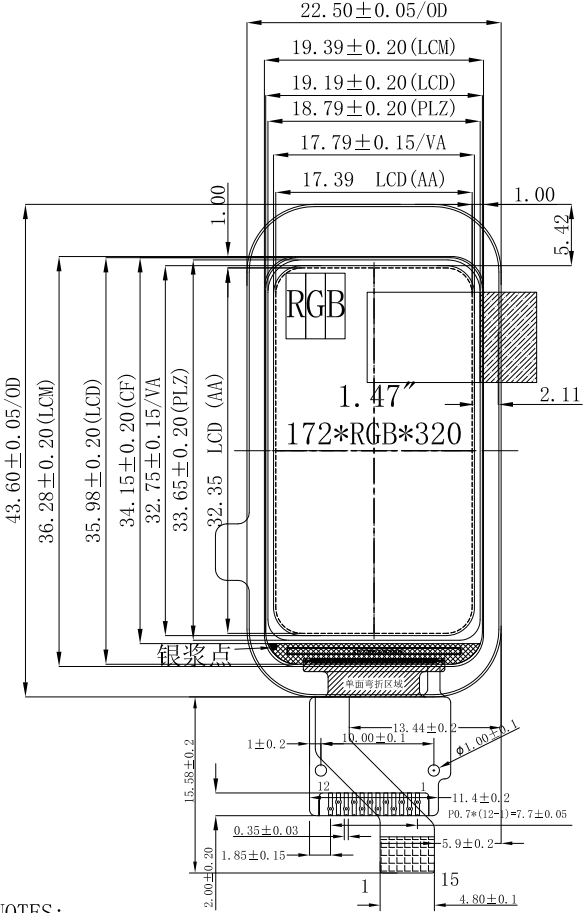

TP-COB接口	
1	GND
2	S12
3	S11
4	S10
5	S9
6	S8
7	S7
8	GND
9	S6
10	S5
11	S4
12	S3
13	S2
14	S1
15	GND

NOTES:

1. DISPLAY TYPE:1.47"IPS TFT/TRANSMISSIVE/NORMALLY BLACK
2. VIEWING DIRECTION: A11
3. DRIVER IC:ST7789P3
4. OPERATING TEMP.: -20° C~70° C
5. STORAGE TEMP.: -30° C~80° C
6. BACKLIGHT: 3 CHIP-WHITE LED
7. LCM Luminance:600 CD/M2(TYP)
8. UNMARKED TOLERANCE:±0.2
9. 建议机壳开窗可视区比 LCD A. A区单边大 0.3mm
10. 产品符合ROHS标准



接口支持: 4W-SPI

PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	GND
7	D/C
8	CS
9	SCL
10	SDA
11	RESET
12	GND

PRODUCT NO: GMT147-01-TP			
DRAFTED BY:	NAME	DATE	Name: 总成图
CHECKED BY:			
CHECKED BY:			
APPROVED BY:			
3RD ANGLE	NOT IN SCALE	UNIT MM	SHEET 1/1