

---

TFT LCD MODULE

**1.47 inch 172RGB\*320DOTS**

MODULE NUMBER:

REVISION: A

|             |
|-------------|
| Customer:   |
| Approved by |

### ***Revised History***

[illegible]

---

## **Contents**

### ***Revision History***

### ***Contents***

- 1. General Description***
- 2. Mechanical Drawing***
- 3. Pin Description***
- 4. Electrical Characteristics***
- 5. Optical Characteristics***
- 6. Reliability***
- 7. Package Specifications***
- 8. Incoming Inspection standards***
- 9. Precautions When Using These TFT Display Modules***
- 10. Warranty***
- 11. Notice***

---

## 1. General Description

### 1.1 Description


GMT147-01 is a 172RGBX320 dot-matrix TFT LCD module. This module is composed of a TFT LCD Panel, driver ICs, FPC and a Backlight unit.

### 1.2 Features

| NO. | Item              | Contents                      | Unit       |
|-----|-------------------|-------------------------------|------------|
| 1   | LCD Size          | 1.47                          | inch       |
| 2   | Display Mode      | Normally black                | -          |
| 3   | Resolution        | 172(H)RGB x320(V)             | pixels     |
| 4   | Pixel pitch       | 0.0337(H) x 0.1011(V)         | mm         |
| 5   | Active area       | 17.3892(H) x 32.352(V)        | mm         |
| 6   | Module size       | 19.39(H) x 36.28(V) x1.46 (D) | mm         |
| 7   | Pixel arrangement | RGB Vertical stripe           | -          |
| 8   | Interface         | 4 Line SPI                    | -          |
| 9   | Display Colors    | 262K                          | colors     |
| 10  | Drive IC          | ST7789V3                      | -          |
| 11  | Luminance(cd/m2)  | 350 (TYP)                     | Cd/m2      |
| 12  | Viewing Direction | All View                      | Best image |
| 13  | Backlight         | 3 White LED Parallel          | -          |
| 14  | Operating Temp.   | -20℃~ + 70℃                   | ℃          |
| 15  | Storage Temp.     | -30℃~+ 80℃                    | ℃          |
| 16  | Weight            | 2.7                           | g          |


## 2. Mechanical Drawing

| Item | Date     | Remark           |
|------|----------|------------------|
| A    | 20210315 | Original Drawing |

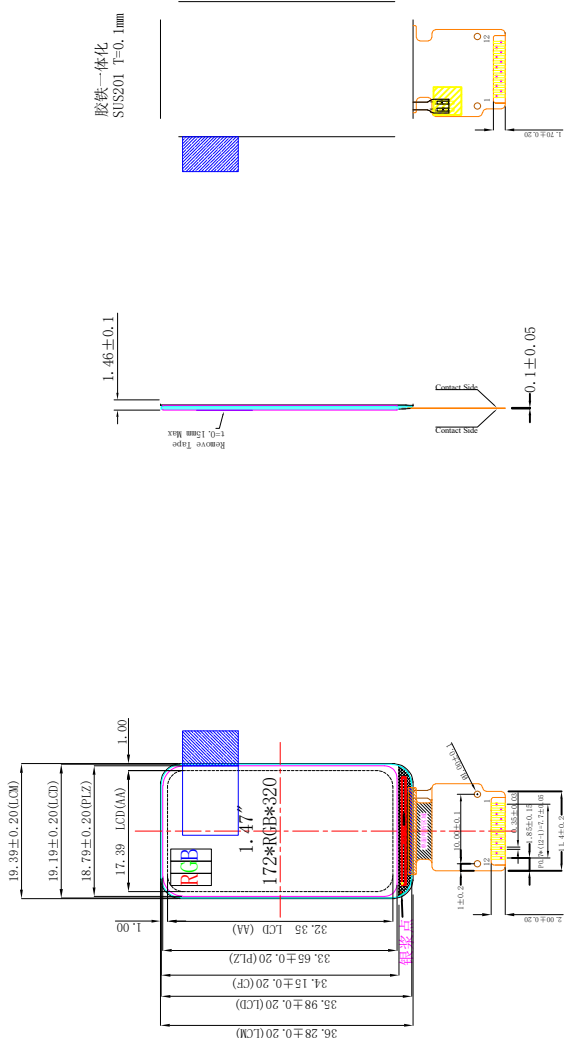

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | GND         |
| 2   | LEDK        |
| 3   | LEDA        |
| 4   | VDD         |
| 5   | GND         |
| 6   | GND         |
| 7   | D/C         |
| 8   | CS          |
| 9   | SCL         |
| 10  | SDA         |
| 11  | RESET       |
| 12  | GND         |

接口支持: 4W-SPI


$$I_f=60\text{mA} \quad V_f=2.8\sim 3.2\text{V}$$

- NOTES:
1. DISPLAY TYPE:1.47"IPS TFT/TRANSMISSIVE/NORMALLY BLACK
  2. VIEWING DIRECTION: A11
  3. DRIVER IC:ST7789V3
  4. OPERATING TEMP.: -20° C~70° C
  5. STORAGE TEMP.: -30° C~80° C
  6. BACKLIGHT: 3 CHIP-WHITE LED
  7. LCM Luminance:350 CD/M2(TYP)
  8. UNMARKED TOLERANCE:±0.2
  9. 建议机壳开槽可视区比 LCD A、A区单边大 0.3mm
  10. 产品符合ROHS标准


|                                |                            |                                                                                     |       |               |       |  |              |  |       |     |                             |                                   |  |
|--------------------------------|----------------------------|-------------------------------------------------------------------------------------|-------|---------------|-------|--|--------------|--|-------|-----|-----------------------------|-----------------------------------|--|
| Customer Approval<br>Signature | GMT147-01                  |                                                                                     |       |               |       |  |              |  |       |     | Drawing Number<br>1.47" TPT | Rev.<br>A                         |  |
|                                | Unless Otherwise Specified |                                                                                     | Title |               | E. E. |  | Panel 1 / E. |  | P. M. |     |                             |                                   |  |
|                                | Unit<br>mm                 |  |       |               | HUNG  |  |              |  |       |     |                             |                                   |  |
|                                | General Roughness          |                                                                                     |       |               | Date  |  | 20210315     |  |       |     |                             |                                   |  |
|                                | Tolerance                  |                                                                                     |       |               | By    |  |              |  | Scale |     | Sheet                       |                                   |  |
|                                |                            | Dimension<br>Angle                                                                  |       | ± 0, 2<br>± 1 |       |  |              |  |       | 1:1 |                             | 1 of 1                            |  |
|                                |                            |                                                                                     |       |               |       |  |              |  |       |     |                             | Size<br>A3                        |  |
|                                |                            |                                                                                     |       |               |       |  |              |  |       |     |                             | Material<br>Soda Lime / Polyimide |  |

### 3. Pin Definition

FPC Connector is used for the module electronics interface.

| NO. | Symbol | Description                                                                                                     |
|-----|--------|-----------------------------------------------------------------------------------------------------------------|
| 1   | GND    | Power Ground.                                                                                                   |
| 2   | LEDK   | LED Cathode                                                                                                     |
| 3   | LED A  | LED Anode                                                                                                       |
| 4   | VDD    | Power Supply for Analog ,VDD=2.5V-3.3V                                                                          |
| 5   | GND    | Power Ground.                                                                                                   |
| 6   | GND    | Power Ground.                                                                                                   |
| 7   | D/C    | Display data/command selection pin .                                                                            |
| 8   | CS     | Chip selection pin ;Low enable ,high disable.                                                                   |
| 9   | SCL    | This pin is used to be serial interface clock                                                                   |
| 10  | SDA    | SPI interface input/output pin .the data is latched on the rising edge of the SCL signal.                       |
| 11  | RESET  | This signal will reset the device and it must be applied to properly initialize the chip .Signal is active low. |
| 12  | GND    | Power Ground.                                                                                                   |

Schematic diagram:

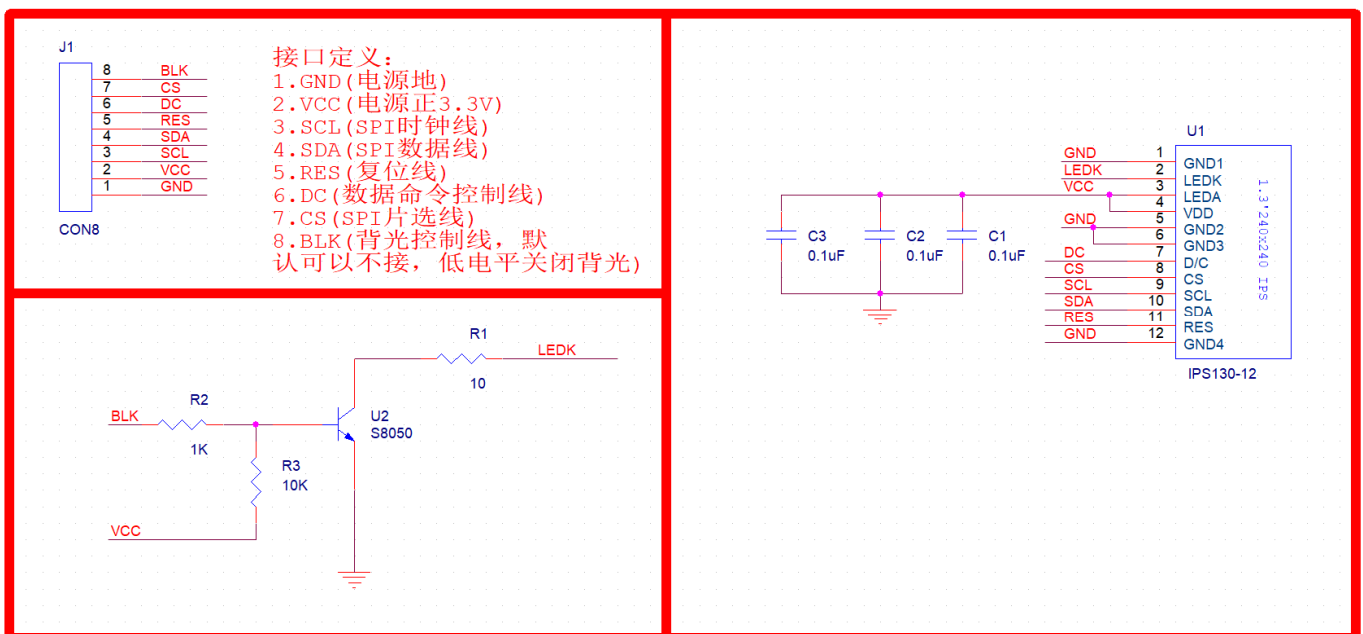

## 4. Electrical Characteristics

### 4.1 Absolute Maximum Ratings

| Parameter             | Symbol | Min  | MAX       | Unit | Notes |
|-----------------------|--------|------|-----------|------|-------|
| Supply Voltage (I/O)  | VDD    | -0.3 | 4.6       | V    |       |
| Analog Supply Voltage | VDDIO  | -0.3 | 4.6       | V    |       |
| Logic Input Voltage   | VIN    | -0.3 | VDDIO+0.5 | V    |       |
| Operation Temperature | Top    | -20  | 70        | °C   |       |
| Storage Temperature   | Tst    | -30  | 80        | °C   |       |

### 4.2 Operating Conditions


| Parameter                   | Symbol            | Min   | TYP | MAX   | Unit | Notes |
|-----------------------------|-------------------|-------|-----|-------|------|-------|
| System Voltage              | VDD               | 2.5   | 2.8 | 3.3   | V    |       |
| Interface Operation Voltage | VDDIO             | 1.65  | 1.8 | 3.3   | V    |       |
| Gate Driver High Voltage    | VGH               | 12.2  | -   | 14.97 | V    |       |
| Gate Driver Low Voltage     | VGL               | -12.5 | -   | -7.16 | V    |       |
| Operating Current for VDD   | I <sub>DD</sub>   | -     | 8   | 10    | mA   |       |
| Sleep_In Mode VDD           | I <sub>dd</sub>   | -     | 15  | 30    | uA   |       |
| Sleep_In Mode VDDIO         | I <sub>ddio</sub> | -     | 5   | 10    | uA   |       |

### 4.3 Backlight Unit

| Parameter                 | Symbol          | Min   | TYP | MAX | Unit              | Notes |
|---------------------------|-----------------|-------|-----|-----|-------------------|-------|
| Voltage for LED backlight | VLED            | 2.8   | 3.0 | 3.2 | V                 |       |
| Current for LED backlight | ILED            | -     | 60  | 90  | mA                | 3 LED |
| Power Consumption         | Pbl             | -     | 180 | 288 | mW                | 1     |
| Brightness                | L <sub>br</sub> | 550   | 600 | -   | cd/m <sup>2</sup> | 2     |
| LED Life time             | -               | 20000 | -   | -   | hr                | 3     |

Note:


1. Where ILED = 60mA , VLED=3.0V , Pbl= ILED x VLED
2. Uniform measure condition:
  - a: Measure 9 point , Measure location is show below:
  - b: Uniform=(Min brightness/Max brightness)x100%
  - c: Best Contrast.

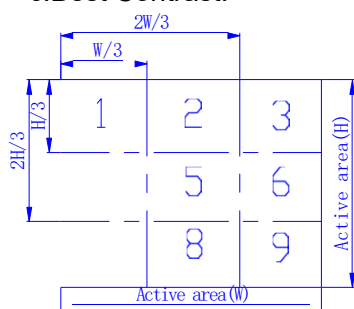

3. The environmental conducted under ambient air flow ,at Ta=25±2°C,60%RH±5%


#### 4.4 Backlight Recommended Circuit

Motherboard driver backlight is need constant current circuit , if threated voltage screen after light brightness difference . Current and power consumption of the machine are inconsistent , so recommend a backlight driving circuit is best rated current . It is recommended to use IC (AW9364) . The reference circuit is as follows:

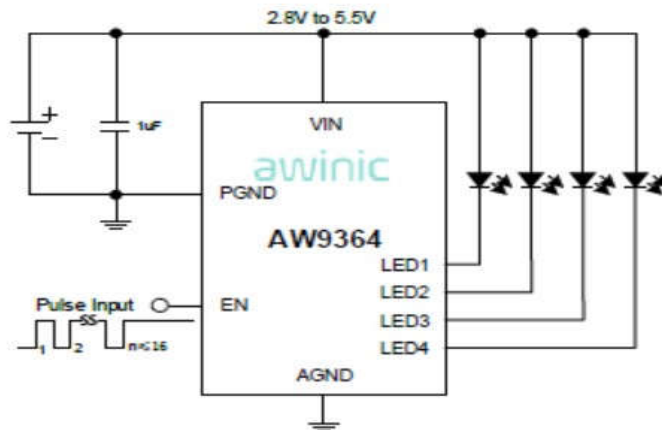

#### 4.5 AC Timing Characteristic of The LCD

Serial interface Characteristics(4-line serial):

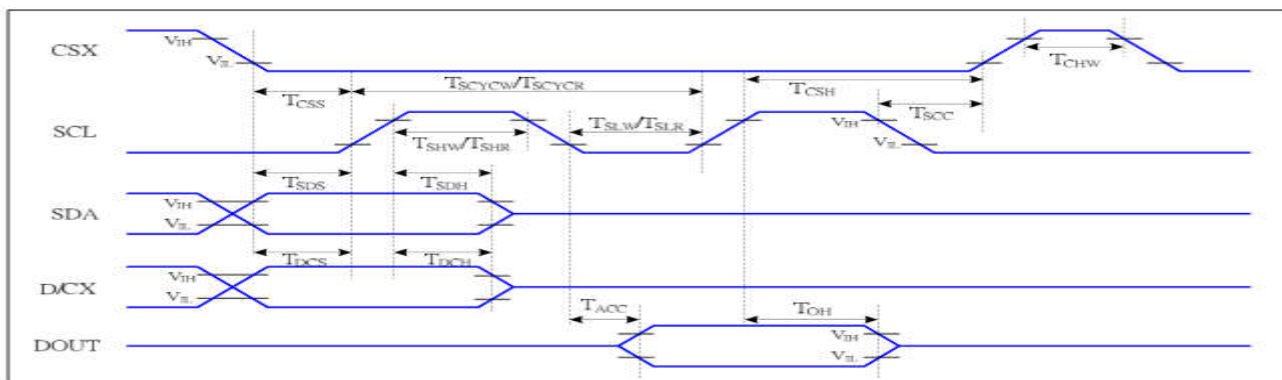


| Signal    | Symbol             | Parameter                      | MIN | MAX | Unit | Description               |
|-----------|--------------------|--------------------------------|-----|-----|------|---------------------------|
| CSX       | T <sub>CSS</sub>   | Chip select setup time (write) | 15  |     | ns   |                           |
|           | T <sub>Csh</sub>   | Chip select hold time (write)  | 15  |     | ns   |                           |
|           | T <sub>CSS</sub>   | Chip select setup time (read)  | 60  |     | ns   |                           |
|           | T <sub>SCC</sub>   | Chip select hold time (read)   | 65  |     | ns   |                           |
|           | T <sub>CHW</sub>   | Chip select "H" pulse width    | 40  |     | ns   |                           |
| SCL       | T <sub>SCYCW</sub> | Serial clock cycle (Write)     | 16  |     | ns   | -write command & data ram |
|           | T <sub>SHW</sub>   | SCL "H" pulse width (Write)    | 7   |     | ns   |                           |
|           | T <sub>SLW</sub>   | SCL "L" pulse width (Write)    | 7   |     | ns   |                           |
|           | T <sub>SCYCR</sub> | Serial clock cycle (Read)      | 150 |     | ns   | -read command & data ram  |
|           | T <sub>SHR</sub>   | SCL "H" pulse width (Read)     | 60  |     | ns   |                           |
|           | T <sub>SLR</sub>   | SCL "L" pulse width (Read)     | 60  |     | ns   |                           |
| D/CX      | T <sub>DCS</sub>   | D/CX setup time                | 10  |     | ns   |                           |
|           | T <sub>DCH</sub>   | D/CX hold time                 | 10  |     | ns   |                           |
| SDA (DIN) | T <sub>SDS</sub>   | Data setup time                | 7   |     | ns   |                           |
|           | T <sub>SDH</sub>   | Data hold time                 | 7   |     | ns   |                           |
| DOUT      | T <sub>ACC</sub>   | Access time                    | 10  | 50  | ns   | For maximum CL=30pF       |
|           | T <sub>OH</sub>    | Output disable time            | 15  | 50  | ns   | For minimum CL=8pF        |

## 5. OPTICAL CHARACTERISTICS

| Item                           | Symbol     | Measuring Conditions                   |       | Min.  | Typ.  | Max.  | Unit  | Remark |
|--------------------------------|------------|----------------------------------------|-------|-------|-------|-------|-------|--------|
| Viewing Angle                  | $\theta$   | $\phi = 0^\circ$                       | 25 °C | 80    | 85    | -     | Deg   | Note1  |
|                                |            | $\phi = 180^\circ$                     | 25 °C | 80    | 85    | -     |       |        |
|                                | $\theta$   | $\phi = 90^\circ$                      | 25 °C | 80    | 85    | -     |       |        |
|                                |            | $\phi = 270^\circ$                     | 25 °C | 80    | 85    | -     |       |        |
| Brightness                     | $L_{br}$   | --                                     | -     | 550   | 600   | -     | Cd/m2 |        |
| Luminance Uniformity           | $\Delta L$ | --                                     | -     | 75    |       | -     |       |        |
| Contrast Ratio                 | CR         | --                                     | 25 °C | 1000  | 1500  | -     | --    | Note2  |
| Response Time                  | $Tr+Tf$    | $\theta = 0^\circ$<br>$\phi = 0^\circ$ | 25 °C | -     | 30    | 40    | ms    | Note3  |
| Color of CIE Coordinate        | White      | X                                      | 25 °C | -0.03 | 0.263 | +0.03 | --    | BM-7A  |
|                                |            | Y                                      | 25 °C |       | 0.275 |       |       |        |
|                                | Red        | X                                      | 25 °C |       | 0.647 |       |       |        |
|                                |            | Y                                      | 25 °C |       | 0.338 |       |       |        |
|                                | Green      | X                                      | 25 °C |       | 0.313 |       |       |        |
|                                |            | Y                                      | 25 °C |       | 0.618 |       |       |        |
|                                | Blue       | X                                      | 25 °C |       | 0.151 |       |       |        |
|                                |            | Y                                      | 25 °C |       | 0.060 |       |       |        |
| Transmittance (with polarizer) | --         | --                                     | --    | 4.6   | 5.5   | -     | %     | --     |


Note 1 Definition of Viewing Angle:

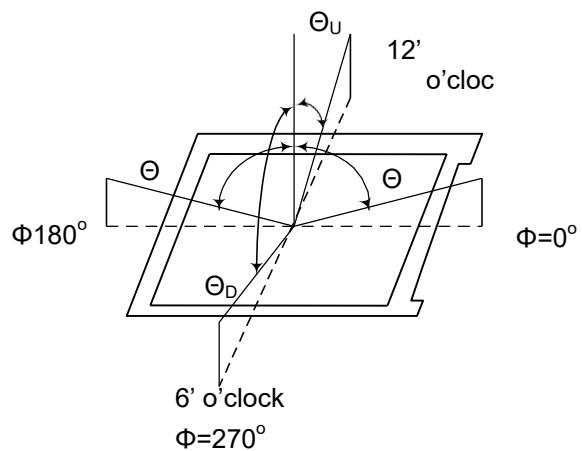

Note 2: Definition of Contrast Ratio (CR) :  
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Note 3: Definition of Response Time : Sum of  $T_r$  and  $T_f$  :

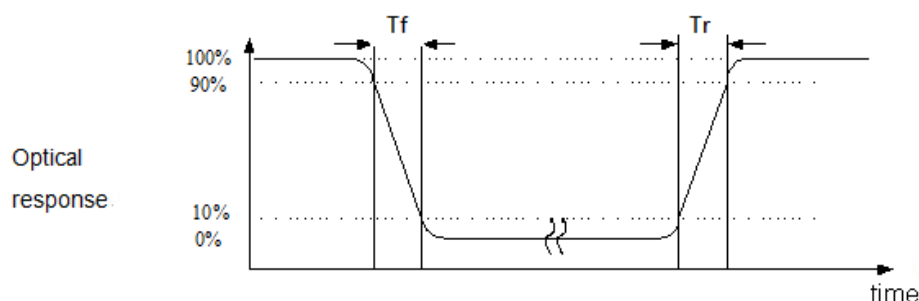

## 6. Reliability

### Contents of Reliability Tests

| No. | Item                                 | Conditions                                                                                                                                                                                                                                                                                                                                                  | Note |
|-----|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1   | High Temperature Operation           | 70°C±2°C, 120 hrs                                                                                                                                                                                                                                                                                                                                           |      |
| 2   | Low Temperature Operation            | -20°C±2°C, 120 hrs                                                                                                                                                                                                                                                                                                                                          |      |
| 3   | High Temperature Storage             | 80°C±2°C, 120 hrs                                                                                                                                                                                                                                                                                                                                           |      |
| 4   | Low Temperature Storage              | -30°C±2°C, 120 hrs                                                                                                                                                                                                                                                                                                                                          |      |
| 5   | High Temperature /Humidity Operation | 60°C±2°C, 90% RH, 120 hrs                                                                                                                                                                                                                                                                                                                                   |      |
| 6   | Temperature Cycling                  | -10°C→25°C→60°C→25°C→-10°C<br>30min 5min 30min 5min 30min<br>10 cycle.                                                                                                                                                                                                                                                                                      |      |
| 7   | Vibration Test                       | Total fixed amplitude:1.5mm.<br>Vibration Frequency:10~55Hz<br>One cycle 60 seconds to 3 direction of X,Y,Z each 15 minutes.                                                                                                                                                                                                                                |      |
| 8   | ESD Test                             | Air Discharge:Apple ±4KV with 5 times.<br>Contact Discharge:Apple ±2KV with 5 times.                                                                                                                                                                                                                                                                        |      |
| 9   | Drop Test                            | <p>To be measured after dropping from 60cm high on the concrete surface in packing state.</p>  <p><i>Dropping method corner dropping:</i></p> <p><i>A corner: Once edge dropping.</i><br/> <i>B, C, D edge: Once face dropping.</i><br/> <i>E, F, G face: Once.</i></p> |      |

Note:

No charge on display and in operation under the following test condition.

Please note that the reliability test project requires the use of virgin samples

Condition : Unless otherwise specified ,tests will be conducted under the following condition.


Temperature:20°C±5°C.

Humidity:65±5%RH.

Tests will be not conducted under functioning state.

## 7. Package Specifications

| Item          |     | Quantity |                                          |
|---------------|-----|----------|------------------------------------------|
| Module        |     | 660      | per Primary Box                          |
| Holding Trays | (A) | 15       | per Primary Box                          |
| Total Trays   | (B) | 16       | per Primary Box (Including 1 Empty Tray) |
| Primary Box   | (C) | 1~4      | per Carton (4 as Major / Maximum)        |

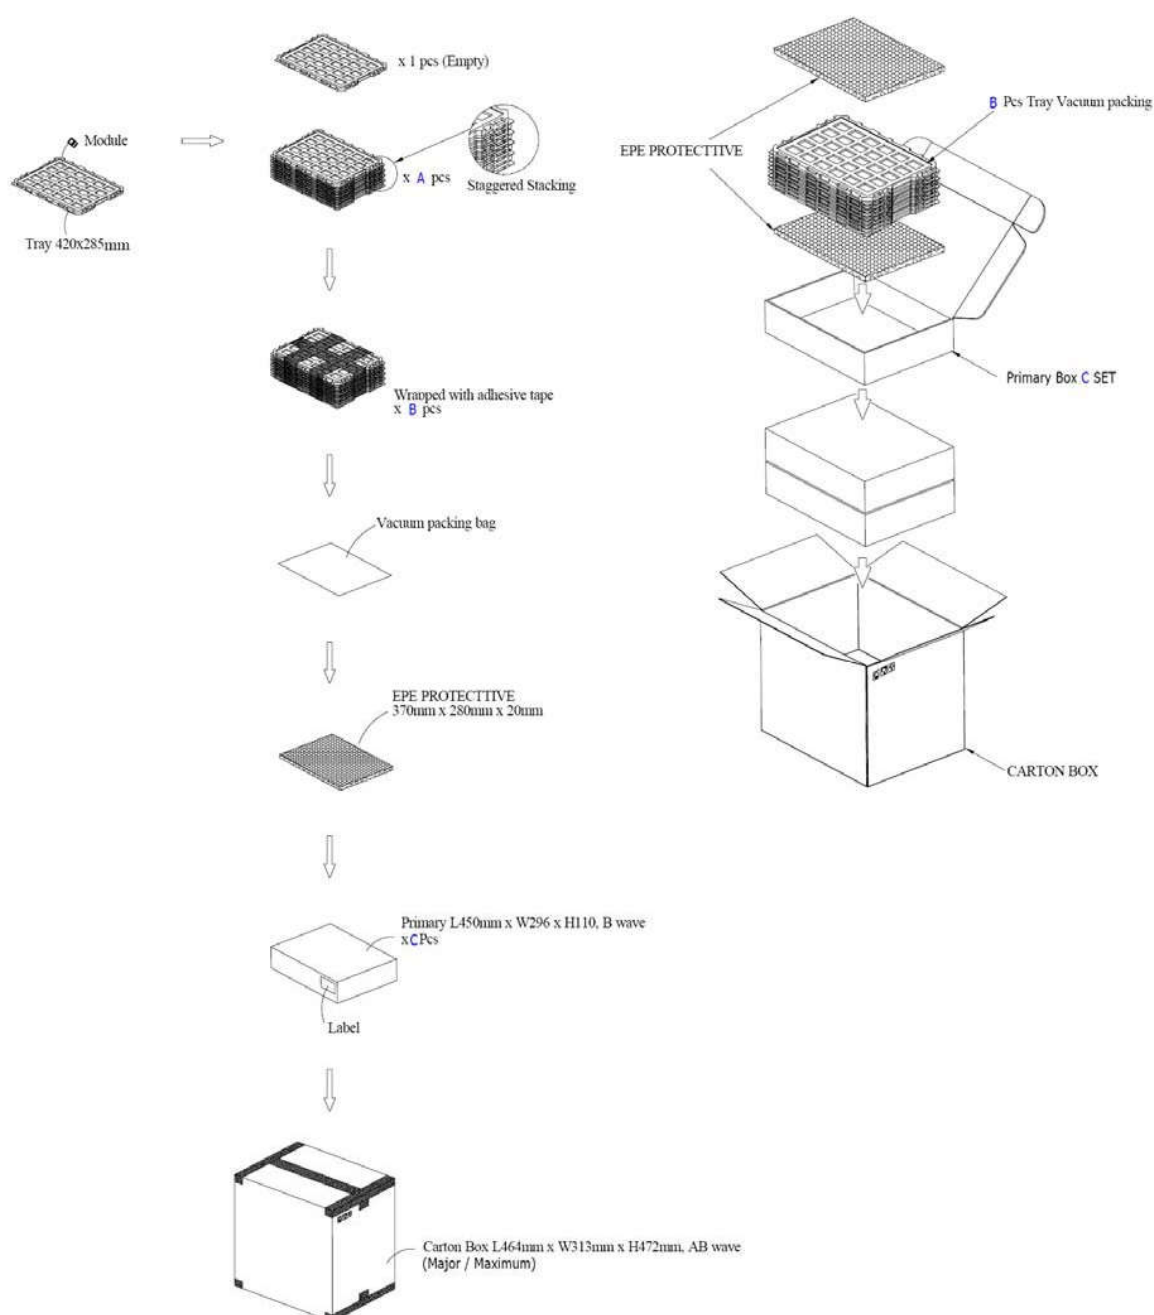


## 8. Incoming Inspection Standards

### 8.1. Inspection and Environment Conditions

#### 8.1.1. Inspection Conditions:

- (1) Inspection Distance :35 cm $\pm$ 5cm
- (2) View Angle : Light-on InspectionAngle:  $\pm 5^\circ$   
Cosmetic Inspection Angle:  $\pm 45^\circ$

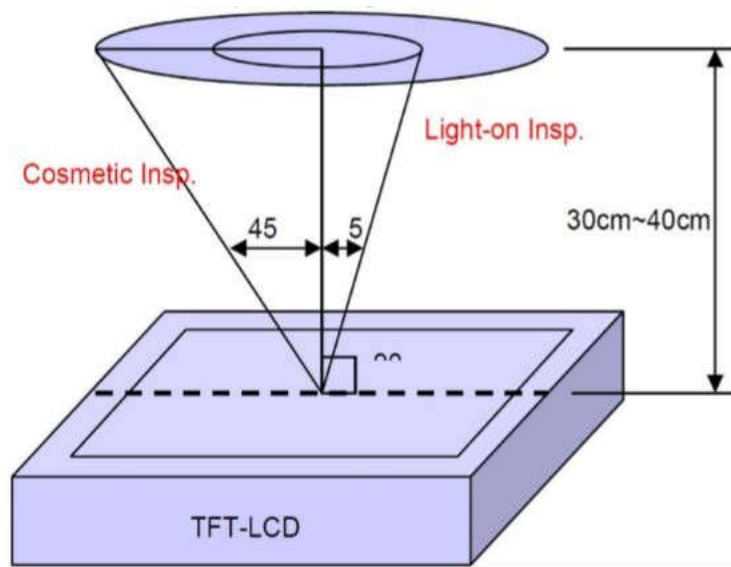

(perpendicular to LCD panel surface)

#### 8.1.2 Environment Conditions:

|                      |                       |                   |
|----------------------|-----------------------|-------------------|
| Ambient Temperature  |                       | 23°C $\pm$ 5°C    |
| Ambient Humidity     |                       | 55 $\pm$ 10%RH    |
| Ambient Illumination | Cosmetic Inspection   | More than 600 Lux |
|                      | Functional Inspection | 300~500 Lux       |




#### 8.1.3 Sampling Conditions:


- (1) Lot Size:Quantity of shipment lot per model
- (2) Sampling Method:

|               |              |                                    |
|---------------|--------------|------------------------------------|
| Sampling Plan |              | MIL-STD-105E                       |
|               |              | Normal Inspection, Single Sampling |
|               |              | Level II                           |
| AQL           | Major Defect | 0.65%                              |
|               | Minor Defect | 1.5%                               |






#### 8.1.4 Inspection Criteria

##### 8.1.4.1 Cosmetic Inspection(Panel):
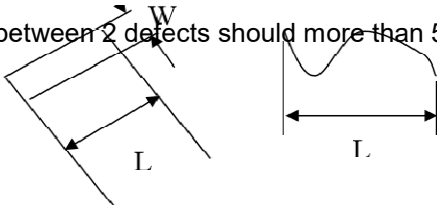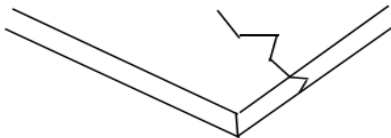
| Check Item                                                                                         | Classification       | Criteria(Unit: mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
|----------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------|--------------------|---------------------|---------------|--------|----------------------------|----------------------|---|----------------------------|------------|---|------------------|--|---|-------|--|----------------------------------|
| Black / White spot<br>Foreign material<br>(Round type)<br>Pinholes Stain<br>Particles inside cell. | Minor                | <div><table><tr><th>Size</th><th>Area</th><th>Acc. Qty</th></tr><tr><td><math>\varphi \leq 0.10</math></td><td></td><td>Ignore</td></tr><tr><td><math>0.10 &lt; \varphi \leq 0.15</math></td><td></td><td>2</td></tr><tr><td><math>0.15 &lt; \varphi \leq 0.20</math></td><td></td><td>1</td></tr><tr><td><math>0.20 &lt; \varphi</math></td><td></td><td>0</td></tr><tr><td>Total</td><td></td><td>2 no include <math>\varphi \leq 0.10</math></td></tr></table><p><math>\varphi = (a + b) / 2</math></p></div> | Size             | Area     | Acc. Qty           | $\varphi \leq 0.10$ |               | Ignore | $0.10 < \varphi \leq 0.15$ |                      | 2 | $0.15 < \varphi \leq 0.20$ |            | 1 | $0.20 < \varphi$ |  | 0 | Total |  | 2 no include $\varphi \leq 0.10$ |
| Size                                                                                               | Area                 | Acc. Qty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| $\varphi \leq 0.10$                                                                                |                      | Ignore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| $0.10 < \varphi \leq 0.15$                                                                         |                      | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| $0.15 < \varphi \leq 0.20$                                                                         |                      | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| $0.20 < \varphi$                                                                                   |                      | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| Total                                                                                              |                      | 2 no include $\varphi \leq 0.10$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| Black and White line<br>Scratch<br>Foreign material<br>(Line type)                                 | Minor                | <div><p>Distance between 2 defects should more than 5mm apart.</p><table><tr><th>Length</th><th>Width</th><th>Acc. Qty</th></tr><tr><td>/</td><td><math>W \leq 0.03</math></td><td>Ignore</td></tr><tr><td><math>L \leq 2</math></td><td><math>0.03 &lt; W \leq 0.05</math></td><td>1</td></tr><tr><td>/</td><td><math>0.05 &lt; W</math></td><td>0</td></tr><tr><td colspan="2">Total</td><td>1</td></tr></table></div>                                                                                       | Length           | Width    | Acc. Qty           | /                   | $W \leq 0.03$ | Ignore | $L \leq 2$                 | $0.03 < W \leq 0.05$ | 1 | /                          | $0.05 < W$ | 0 | Total            |  | 1 |       |  |                                  |
| Length                                                                                             | Width                | Acc. Qty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| /                                                                                                  | $W \leq 0.03$        | Ignore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| $L \leq 2$                                                                                         | $0.03 < W \leq 0.05$ | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| /                                                                                                  | $0.05 < W$           | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| Total                                                                                              |                      | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| Glass Crack                                                                                        | Minor                | <div><p>Distance between 2 defects should more than 5mm apart.<br/>Scratches not vi<br/>play are acceptable.</p></div>                                                                                                                                                                                                                                                                                                                                                                                        |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| Glass Chipping Pad<br>Area                                                                         |                      | <div><p>LCD with extensible crack line is unacceptable(When press the cracked LCD Area, the line will expand,we define it is extensible crack line)</p><table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td><math>c &lt; 5.0, b &lt; 0.4</math></td><td>Ignore</td></tr></table></div>                                                                                                                                                                                                                                                                                               | Length and Width | Acc. Qty | $c < 5.0, b < 0.4$ | Ignore              |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| Length and Width                                                                                   | Acc. Qty             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |
| $c < 5.0, b < 0.4$                                                                                 | Ignore               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                  |          |                    |                     |               |        |                            |                      |   |                            |            |   |                  |  |   |       |  |                                  |



Minor

| Check Item                                                                                            | Classification |                                                                                                                        | Length and Width             | Acc. Qty |
|-------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------|------------------------------|----------|
|                      | Minor          |                                                                                                                        | $c > 3.0, b < 1.0$           | 1        |
|                                                                                                       |                |                                                                                                                        | $c < 3.0, b < 1.0$           | 2        |
|                                                                                                       |                |                                                                                                                        | $c < 3.0, b < 0.5$           | 4        |
|                                                                                                       |                |                                                                                                                        | $a < \text{Glass Thickness}$ |          |
|                      | Minor          |                                                                                                                        | Length and Width             | Acc. Qty |
|                                                                                                       |                |                                                                                                                        | $c \leq 0.6, b < 5.0$        | Ignore   |
|                                                                                                       |                |                                                                                                                        | $a < \text{Glass Thickness}$ |          |
|                     | Minor          |                                                                                                                        | Length and Width             | Acc. Qty |
|                                                                                                       |                |                                                                                                                        | $c < 2.0, b < 1.5$           | Ignore   |
|                                                                                                       |                |                                                                                                                        | $c < 1.5, b < 2$             | Ignore   |
|                                                                                                       |                |                                                                                                                        | $a < \text{Glass Thickness}$ |          |
|                    | Minor          | Glass burr don't affect assemble and module dimension.                                                                 | Length                       | Acc. Qty |
|                                                                                                       |                |                                                                                                                        | $F < 0.5$                    | Ignore   |
|                                                                                                       |                |                                                                                                                        |                              |          |
|  <p>FPC Defect</p> | Minor          | <p>1.Dent , pinhole width <math>a &lt; W/2</math>.<br/>( W:circuitry width)</p> <p>2.Open circuit is unacceptable.</p> |                              |          |
| Bubble on Polarizer                                                                                   | Minor          | 3.No ox                                                                                                                | Diameter                     | Acc. Qty |
|                                                                                                       |                |                                                                                                                        | $\phi \leq 0.15$             | Ignore   |
|                                                                                                       |                |                                                                                                                        | $0.15 < \phi \leq 0.20$      | 2        |
|                                                                                                       |                |                                                                                                                        | $0.20 < \phi \leq 0.30$      | 1        |
|                                                                                                       |                |                                                                                                                        | $0.3 < \phi$                 | None     |

| Check Item                                                                        | Classification | Criteria(Unit: mm)                                                                                                                                                                                                                                                                                                                                               |          |          |                     |        |                            |   |                            |   |                 |      |
|-----------------------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|---------------------|--------|----------------------------|---|----------------------------|---|-----------------|------|
| Dent on Polarizer                                                                 | Minor          | <table><tr><th>Diameter</th><th>Acc. Qty</th></tr><tr><td><math>\varphi \leq 0.15</math></td><td>Ignore</td></tr><tr><td><math>0.15 &lt; \varphi \leq 0.20</math></td><td>2</td></tr><tr><td><math>0.20 &lt; \varphi \leq 0.30</math></td><td>1</td></tr><tr><td><math>0.3 &lt; \varphi</math></td><td>None</td></tr></table>                                    | Diameter | Acc. Qty | $\varphi \leq 0.15$ | Ignore | $0.15 < \varphi \leq 0.20$ | 2 | $0.20 < \varphi \leq 0.30$ | 1 | $0.3 < \varphi$ | None |
| Diameter                                                                          | Acc. Qty       |                                                                                                                                                                                                                                                                                                                                                                  |          |          |                     |        |                            |   |                            |   |                 |      |
| $\varphi \leq 0.15$                                                               | Ignore         |                                                                                                                                                                                                                                                                                                                                                                  |          |          |                     |        |                            |   |                            |   |                 |      |
| $0.15 < \varphi \leq 0.20$                                                        | 2              |                                                                                                                                                                                                                                                                                                                                                                  |          |          |                     |        |                            |   |                            |   |                 |      |
| $0.20 < \varphi \leq 0.30$                                                        | 1              |                                                                                                                                                                                                                                                                                                                                                                  |          |          |                     |        |                            |   |                            |   |                 |      |
| $0.3 < \varphi$                                                                   | None           |                                                                                                                                                                                                                                                                                                                                                                  |          |          |                     |        |                            |   |                            |   |                 |      |
|  | /              | Test for insertion of plug gauge at highest warping point:<br>$H \leq 0.25\text{mm}$<br>The client has special requirements, according to drawing.                                                                                                                                                                                                               |          |          |                     |        |                            |   |                            |   |                 |      |
| Bezel                                                                             | /              | 1.No rust, distortion on the Bezel.<br>2.No visible fingerprints, stains or other contamination.<br><br>D:Diameter W: width L: length<br>1.Spot: $D \leq 0.2$ is acceptable<br>$0.2 < D \leq 0.3$ , acceptable Inspection and Environment Conditions<br>2dots are acceptable and the distance between defects Should more than 5mm.<br>$D > 0.3$ is unacceptable |          |          |                     |        |                            |   |                            |   |                 |      |
| Touch Panel                                                                       | /              | 2.Dent: $D > 0.3$ is unacceptable.<br>3.Scratch: $W \leq 0.03, L \leq 10$ is acceptable,<br>$0.03 < W \leq 0.1, L \leq 10$ , acceptable Inspection and Environment Conditions<br><br>Distance between 2 defects should more than 5 mm.<br>$W > 0.1$ is unacceptable.                                                                                             |          |          |                     |        |                            |   |                            |   |                 |      |
| PCB                                                                               | /              | 1.No distortion or contamination on PCB terminals.<br>2.All components on PCB must same as documented on the BOM/component layout.<br>3.Follow IPC-A-600F.                                                                                                                                                                                                       |          |          |                     |        |                            |   |                            |   |                 |      |
| Soldering                                                                         | /              | Follow IPC-A-610C standard.                                                                                                                                                                                                                                                                                                                                      |          |          |                     |        |                            |   |                            |   |                 |      |
| Leak                                                                              | /              | Yellow light, OK。 White light, According to the limit sample                                                                                                                                                                                                                                                                                                     |          |          |                     |        |                            |   |                            |   |                 |      |

| Check Item        | Classification | Criteria(Unit: mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical Defect | Major          | <p>The below defects must be rejected.</p> <ol style="list-style-type: none"> <li>1. Missing vertical / horizontal segment.</li> <li>2. Abnormal Display.</li> <li>3. No function or no display.</li> <li>4. Current exceeds product specifications.</li> <li>5. LCD viewing angle defect.</li> <li>6. No Backlight.</li> <li>7. Dark Backlight.</li> <li>8. Touch Panel no function.</li> <li>9. Dark Dot –one Allowed.</li> <li>10. Bright Dot- one Allowed.</li> </ol> |

## 9. Precautions When Using These TFT Display Modules


### 9.1 Handling Precautions

- 1) Since the display panel is being made of glass, do not apply mechanical impacts such as dropping from a high position.
- 2) If the display panel is broken by some accident and the internal organic substance leaks out, be careful not to inhale nor lick the organic substance.
- 3) If pressure is applied to the display surface or its neighborhood of the TFT display module, the cell structure may be damaged and be careful not to apply pressure to these sections.
- 4) The polarizer covering the surface of the TFT display module is soft and easily scratched. Please be careful when handling the TFT display module.
- 5) When the surface of the polarizer of the TFT display module has soil, clean the surface. It takes advantage of by using following adhesion tape.
  - \* Scotch Mending Tape No. 810 or an equivalent

Never try to breathe upon the soiled surface nor wipe the surface using cloth containing solvent such as ethyl alcohol, since the surface of the polarizer will become cloudy.

Also, pay attention that the following liquid and solvent may spoil the polarizer:

  - \* Water
  - \* Ketone
  - \* Aromatic Solvents
- 6) Hold TFT display module very carefully when placing TFT display module into the system housing. Do not apply excessive stress or pressure to TFT display module. And, do not over bend the film with electrode pattern layouts. These stresses will influence the display performance. Also, secure sufficient rigidity for the outer cases.

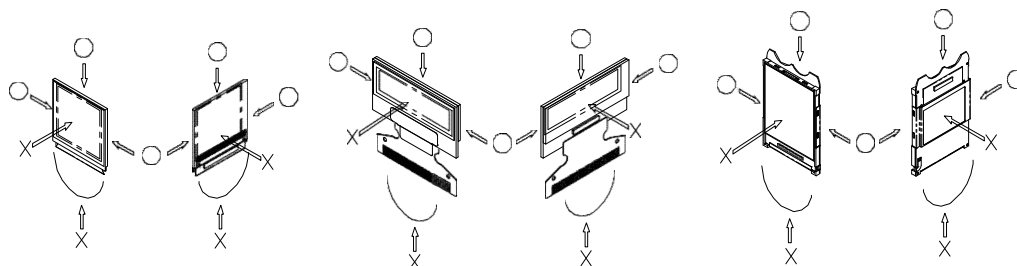

- 7) Do not apply stress to the driver IC and the surrounding molded sections.
- 8) Do not disassemble nor modify the TFT display module.
- 9) Do not apply input signals while the logic power is off.

- 
- 10) Pay sufficient attention to the working environments when handling TFT display modules to prevent occurrence of element breakage accidents by static electricity.
    - \* Be sure to make human body grounding when handling TFT display modules.
    - \* Be sure to ground tools to use or assembly such as soldering irons.
    - \* To suppress generation of static electricity, avoid carrying out assembly work under dry environments.
    - \* Protective film is being applied to the surface of the display panel of the TFT display module.  
Be careful since static electricity may be generated when exfoliating the protective film.
  - 11) Protection film is being applied to the surface of the display panel and removes the protection film before assembling it. At this time, if the TFT display module has been stored for a long period of time, residue adhesive material of the protection film may remain on the surface of the display panel after removed of the film. In such case, remove the residue material by the method introduced in the above Section 5).
  - 12) If electric current is applied when the TFT display module is being dewed or when it is placed under high humidity environments, the electrodes may be corroded and be careful to avoid the above.

## **9.2 Storage Precautions**

- 1) When storing TFT display modules, put them in static electricity preventive bags avoiding exposure to direct sun light nor to lights of fluorescent lamps. and, also, avoiding high temperature and high humidity environment or low temperature (less than 0°C) environments. (We recommend you to store these modules in the packaged state when they were shipped from Zhong Jingyuan technology Inc.)  
At that time, be careful not to let water drops adhere to the packages or bags nor let dewing occur with them.
- 2) If electric current is applied when water drops are adhering to the surface of the TFT display module, when the TFT display module is being dewed or when it is placed under high humidity environments, the electrodes may be corroded and be careful about the above.

## **9.3 Designing Precautions**

- 1) The absolute maximum ratings are the ratings which cannot be exceeded for TFT display module, and if these values are exceeded, panel damage may happen.
- 2) To prevent occurrence of malfunctioning by noise, pay attention to satisfy the  $V_{IL}$  and  $V_{IH}$  specifications and, at the same time, to make the signal line cable as short as possible.
- 3) We recommend you to install excess current preventive unit (fuses, etc.) to the power circuit ( $V_{DD}$ ). (Recommend value: 0.5A)
- 4) Pay sufficient attention to avoid occurrence of mutual noise interference with the neighboring devices.
- 5) As for EMI, take necessary measures on the equipment side basically.
- 6) When fastening the TFT display module, fasten the external plastic housing section.
- 7) If power supply to the TFT display module is forcibly shut down by such errors as taking out the main battery while the TFT display panel is in operation, we cannot guarantee the quality of this OEL display module.
- 8) The electric potential to be connected to the rear face of the IC chip should be as follows:
  - \* Connection (contact) to any other potential than the above may lead to rupture of the IC.

## **9.4 Precautions when disposing of the TFT display modules**

- 1) Request the qualified companies to handle industrial wastes when disposing of the TFT display modules. Or, when burning them, be sure to observe the environmental and hygienic laws and regulations.

## **9.5 Other Precautions**

- 1) When an TFT display module is operated for a long of time with fixed pattern may remain as an after image or slight contrast deviation may occur.  
Nonetheless, if the operation is interrupted and left unused for a while, normal state can be restored. Also, there will be no problem in the reliability of the module.
  - 2) To protect TFT display modules from performance drops by static electricity rapture, etc., do not touch the following sections whenever possible while handling the TFT display modules.
    - \* Pins and electrodes
-

---

\* Pattern layouts such as the FPC