

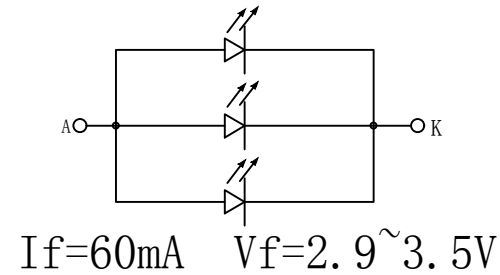
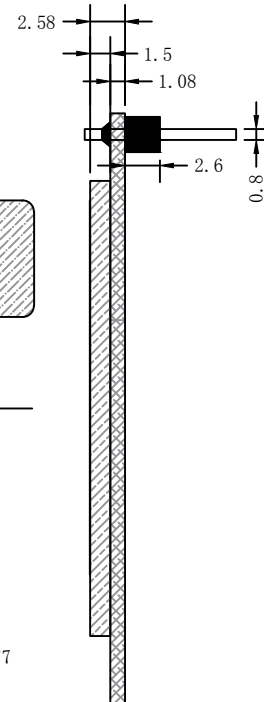


All Pages Of This Edition Approved

Signature: Date: 2023-4-23

REV.	DESCRIPTION	REVISER	DATE
A0	FIRST	YaQing Y.	2023-04-23

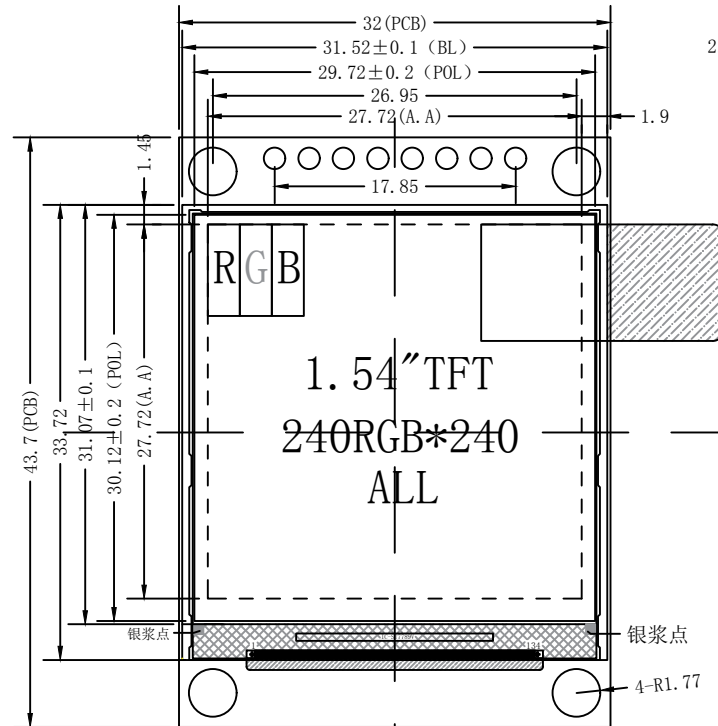


DOT DETALL
SCALE 10X

PIN	DESCRIPTION
1	GND
2	VCC
3	SCL
4	SDA
5	RST
6	DC
7	CS
8	BL

NOTES:

1. DISPLAY TYPE: 1.54" TFT
2. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACK
3. BACK LIGHT: 3 CHIP-WHITE LED
4. LCM Luminance: 400 CD/M2 (TYP)
5. UNMARKED TOLERANCE: ±0.2
6. OPERATING TEMP: -20° C TO 70° C
7. STORAGE TEMP: -30° C TO 80° C
8. VIEWING DIRECTION: ALL
9. OLED DRIVE IC: ST7789V
10. DISPLAY COLOR: 262K
11. UNSPECIFIED TOLERANCES: ± 0.2mm.
12. MEANS: DIMENSION FOR REFERENCE
13. Contrast Ratio: 800
14. Response Time : 30msec

MODEL NUMBER:	GMT154-7P模块SPI		SHEET:	1 OF 1
DESIGNED BY:	YaQing Y.		SCALE:	1 OF 1
Unspecified Tolerance	±0.20MM		DATE:	2023-4-23